



Tahák pro ESP tutorial

PIN DEFINITION

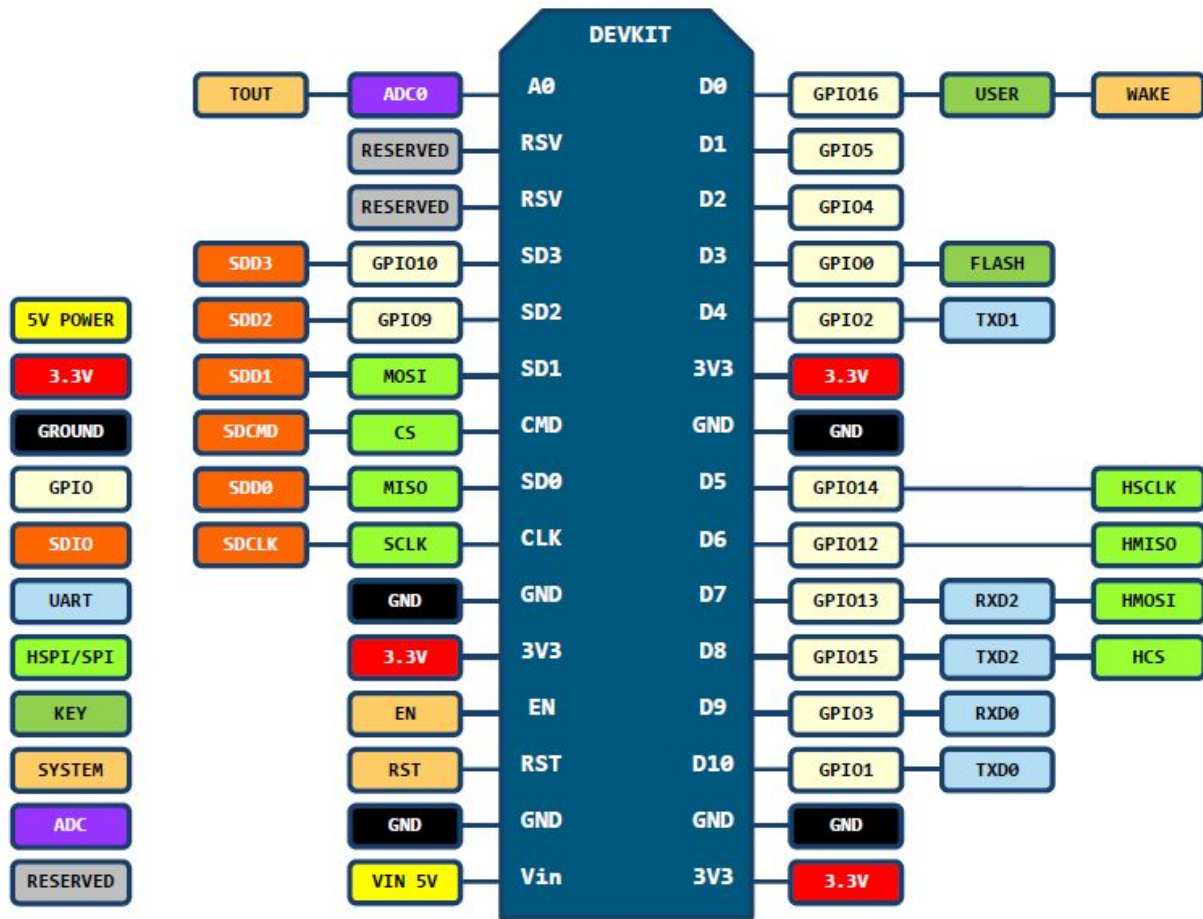

D0(GPIO16) can only be used as gpio read/write, no interrupt supported, no pwm/i2c/ow supported.

LED



RGB LED Common Cathode



- 1 - RED
- 2 - GROUND
- 3 - GREEN
- 4 - BLUE

Select the color of each band on the resistor:

Orange Black Black Black Brown


Resistor Value: 300 Ohms 1% Search

Select the color of each band on the resistor:


Brown Black Black Red Brown

Resistor Value: 10k Ohms 1% Search


Si7021 Humidity Sensor

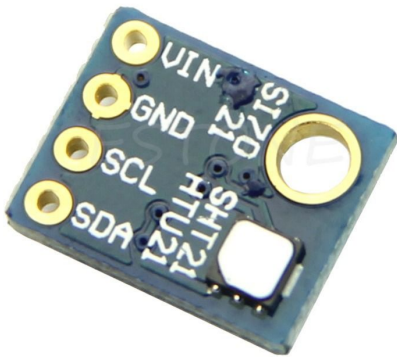

BH1750FVI Digital Light Intensity Sensor

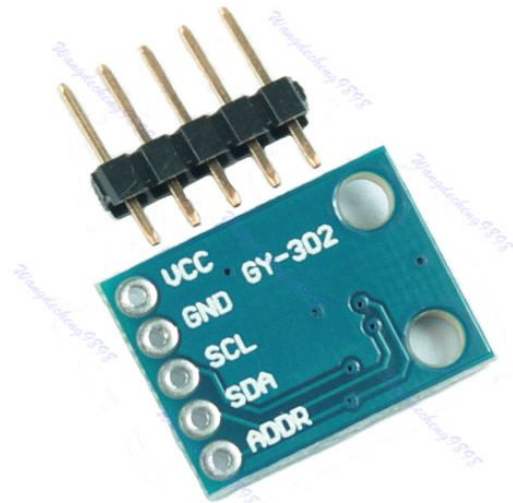

Raindrops Detection sensor

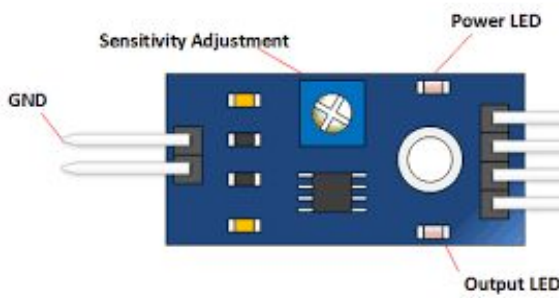

Temperature sensor Dallas DS18B20



TO-92 (DS18B20)